

Web-Trap® Steel Triangle-Triangle Slings

Basket Hardware Web Slings

Type 1

Single Ply Web-Trap® Triangle – Triangle Slings



Material Width	Stock Code	Working Load Limit [lbs]					Min Length	Weight	
		Vertical 90°	120° Choke	90° Basket	60° Basket	45° Basket		[ft]	10ft Sling
[in]									
2"	TT1 902	3,100	-	6,200	5,350	4,350	3	3.84	0.11
3"	TT1 903	4,700	-	9,400	8,100	6,600	3	6.21	0.18
4"	TT1 904	6,200	-	12,400	10,700	8,750	3	8.54	0.22
6"	TT1 906	9,300	-	18,600	16,100	13,150	5	13.39	0.32
8"	TT1 908	11,800	-	23,600	20,400	16,650	6	32.01	0.45
10"	TT1 910	14,700	-	29,400	25,450	20,750	8	40.89	0.60
12"	TT1 912	17,600	-	35,200	30,450	24,850	8	47.08	0.73



Double Ply Web-Trap® Triangle – Triangle Slings

Material Width	Stock Code	Working Load Limit [lbs]					Min Length	Weight	
		Vertical 90°	120° Choke	90° Basket	60° Basket	45° Basket		[ft]	10ft Sling
[in]									
2"	TT2 902	6,200	-	12,400	10,700	8,750	3	4.9	0.22
3"	TT2 903	8,600	-	17,600	15,200	12,400	3	7.84	0.35
4"	TT2 904	11,000	-	22,000	19,050	15,550	3	10.52	0.44
6"	TT2 906	16,500	-	33,000	28,550	23,300	5	15.7	0.66
8"	TT2 908	22,400	-	45,400	39,300	32,100	6	35.31	0.91
10"	TT2 910	28,000	-	56,800	49,150	40,150	6	44.4	1.18
12"	TT2 912	33,600	-	68,200	59,050	48,200	6	51.52	1.45

Web-Trap® Steel Triangles & Choker Triangles

Steel Triangles for Web Slings


Product details

Application

- Web-Trap® design keeps sling material in place, reducing wear and increasing sling life.
- Forged steel (unless noted).
- For use with one or two-ply web slings.
- Plated for corrosion resistance.
- Complies with ASME B30.9 sling capacities.

Features and benefits

- Forged steel (unless noted).
- For use with one or two-ply

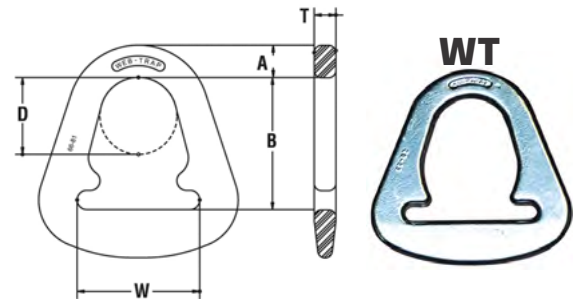

Model Number	Rated Capacity [lbs]	Dimensions [in]						Weight [lbs]
		A	B	C	D	T	W	
Web-Trap® Triangles (WT)								
WT2	6,200	11/16	2-3/8	-	1-3/4	9/16	2	1
WT3	8,600	13/16	3-7/16	-	2	9/16	3	2
WT4	11,500	15/16	4	-	2-3/8	9/16	4	2.6
WT6*	16,800	1-1/16	5-9/16	-	3-1/8	3/4	6	6.3
WT8*	22,400	1-7/16	6-1/2	-	4	3/4	8	10.2
WT10*	28,000	1-1/2	8-1/4	-	5	1	10	17
WT12*	33,600	1-3/4	8-3/4	-	5-1/2	1	12	24



NEVER EXCEED THE WORKING LOAD LIMIT.
 ALWAYS CHECK THE IDENTIFICATION TAG TO DETERMINE THE SLINGS RATED CAPACITY IS APPROPRIATE FOR THE APPLICATION. RATINGS LISTED ARE VALID FOR NEW SLINGS ONLY. ALWAYS INSPECT BEFORE USE

Sling Protection
 Web Slings
 Round Slings
 Synthetic Chain Slings
 Wire Rope Slings
 Chain Slings
 Shackles & Turnbuckles
 Hooks & Links
 Lifting Points
 Hoists & Blocks
 Lifting Devices
 Pipe & Hose Restraints
 Tie Down Assemblies
 Tie Down Accessories
 Towing & Recovery
 Rope & Cordage

Web-Trap® Steel Triangle-Choker Slings

Basket/Choker Hardware Web Slings

Type 2

Single Ply Web-Trap® Triangle – Choker Slings



Material Width [in]	Stock Code	Working Load Limit [lbs]					Min Length [ft]	Weight	
		Vertical 90°	120° Choke	90° Basket	60° Basket	45° Basket		10ft Sling	per ft
2"	TC1 902	3,100	2,450	6,200	5,350	4,350	3	4.46	0.11
3"	TC1 903	4,700	3,750	9,400	8,100	6,600	3	7.21	0.18
4"	TC1 904	6,200	4,950	12,400	10,700	8,750	4	10.19	0.22
6"	TC1 906	9,300	7,400	18,600	16,100	13,150	6	16.30	0.32
8"	TC1 908	11,800	9,400	23,600	20,400	16,650	6	47.28	0.45
10"	TC1 910	14,700	11,750	29,400	25,450	20,750	8	54.09	0.60
12"	TC1 912	17,600	14,050	35,200	30,450	24,850	8	67.04	0.73



Double Ply Web-Trap® Triangle – Choker Slings

Material Width [in]	Stock Code	Working Load Limit [lbs]					Min Length [ft]	Weight	
		Vertical 90°	120° Choke	90° Basket	60° Basket	45° Basket		10ft Sling	per ft
2"	TC2 902	6,200	4,950	12,400	10,700	8,750	3	5.31	0.22
3"	TC2 903	8,600	7,000	17,600	15,200	12,400	3	8.52	0.35
4"	TC2 904	11,000	8,800	22,000	19,050	15,550	3	11.74	0.44
6"	TC2 906	16,500	13,200	33,000	28,550	23,300	6	17.96	0.66
8"	TC2 908	22,700	18,150	45,400	39,300	32,100	6	49.70	0.91
10"	TC2 910	28,000	22,700	56,800	49,150	40,150	6	56.46	1.18
12"	TC2 912	33,600	27,250	68,200	59,050	48,200	6	70.06	1.45

Web-Trap® Steel Triangles & Choker Triangles

Steel Triangles for Web Slings


Product details

Application

- Web-Trap® design keeps sling material in place, reducing wear and increasing sling life.
- Forged steel (unless noted).
- For use with one or two-ply web slings.
- Plated for corrosion resistance.
- Complies with ASME B30.9 sling capacities.

Features and benefits

- Forged steel (unless noted).
- For use with one or two-ply

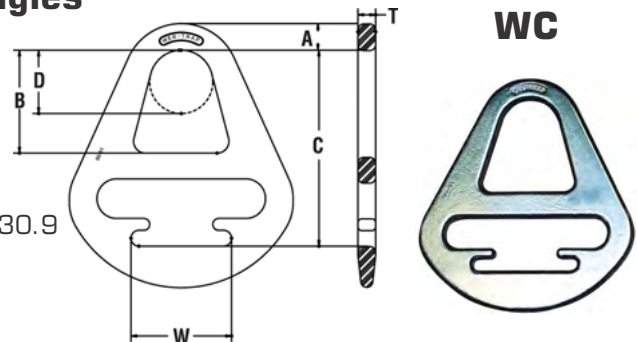

Model Number	Rated Capacity [lbs]	Dimensions [in]						Weight [lbs]
		A	B	C	D	T	W	
Web-Trap® Choker Triangles (WC)								
WC2	8,000	11/16	2-7/16	5-1/8	1-3/4	9/16	2	1.9
WC3	8,600	13/16	3-1/4	6-3/16	2	9/16	3	3.6
WC4	11,500	15/16	3-3/4	6-15/16	2-3/8	9/16	4	5.1
WC6*	16,800	1-1/16	4-3/4	8-7/8	3-1/8	3/4	6	12
WC8*	22,400	1-7/16	5-5/8	10	4	3/4	8	25
WC10*	28,000	1-1/2	7	11-13/16	5	1	10	38
WC12*	33,600	1-3/4	7-3/4	12-13/16	5-1/2	1	12	54



NEVER EXCEED THE WORKING LOAD LIMIT.
 ALWAYS CHECK THE IDENTIFICATION TAG TO DETERMINE THE SLINGS RATED CAPACITY IS APPROPRIATE FOR THE APPLICATION. RATINGS LISTED ARE VALID FOR NEW SLINGS ONLY. ALWAYS INSPECT BEFORE USE