



Green Pin® EE Turnbuckle - G-6311

Turnbuckle with eye-eye end-fitting, generally to ASTM F1145-92

Product details

Product code	G-6323
Material	drop forged high tensile steel SAE 1035 or 1045
Safety factor	MBL equals 5 x WLL
Finish	hot dipped galvanized
Certification	2.1 2.2 3.1 MTCa CE
Standard	generally to ASTM F1145-92, formerly U.S. Federal Specification FF-T-791b

Description


The Green Pin® EE Turnbuckle is a turnbuckle with eye-eye end-fittings, generally to ASTM F1145-92. One of the unique features of Green Pin® Turnbuckles such as this one is that they can be used for both lifting and lashing. Galvanization of the Green Pin® EE Turnbuckle ensures its long-term durability. The turnbuckle is available in a range with a diameter thread 3/8" (take up of 6") up to 2 3/4" (take up of 24").

WARNING: NEVER EXCEED WORKING LOAD LIMIT!

Failure to follow instructions can result in serious property damage, injury or death! For more information please see the turnbuckle warning information found in the hardware section of this catalogue

Highlights

- Can be used for both lifting and lashing
- Galvanization assures long-term durability
- Superior stock availability of 99%
- Reliable Green Pin® quality and support

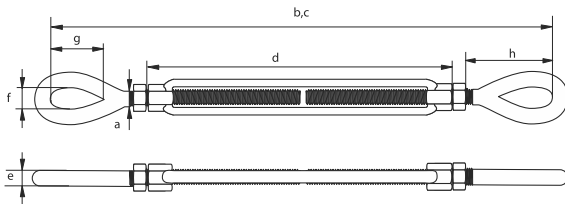

CAD RFID

Item code	WLL		take up		DIMENSIONS (in.)						Net weight
	Tonne	INCH	A	B	C	D	E	F	G	H	LBS
SSGPO01006	0.54	6	3/8	11.50	16.85	7.20	0.39	0.51	1.14	1.93	1.06
SSGPO01206	1.00	6	1/2	12.80	17.91	7.60	0.47	0.71	1.42	2.28	1.79
SSGPO01209	1.00	9	1/2	15.75	23.94	10.63	0.47	0.71	1.42	2.24	2.36
SSGPO01212	1.00	12	1/2	18.74	29.92	13.62	0.47	0.71	1.42	2.24	2.84
SSGPO01606	1.59	6	5/8	14.96	19.80	7.99	0.55	0.83	1.77	3.11	2.93
SSGPO01609	1.59	9	5/8	17.91	25.83	11.02	0.55	0.83	1.77	3.07	3.55
SSGPO01612	1.59	12	5/8	20.91	31.81	14.02	0.55	0.83	1.77	3.07	4.32
SSGPO01906	2.36	6	3/4	16.26	20.94	8.43	0.67	1.02	2.13	3.50	4.48
SSGPO01909	2.36	9	3/4	19.29	26.97	11.46	0.67	1.02	2.13	3.50	5.45
SSGPO01912	2.36	12	3/4	22.20	32.95	14.45	0.67	1.02	2.13	3.46	6.39
SSGPO01918	2.36	18	3/4	28.27	45.00	20.43	0.67	1.02	2.13	3.50	8.69
SSGPO02212	3.27	12	7/8	23.78	34.25	14.84	0.79	1.26	2.40	3.98	9.50
SSGPO02218	3.27	18	7/8	29.76	46.22	20.83	0.79	1.26	2.40	3.98	12.15
SSGPO02506	4.54	6	1	19.61	23.78	9.21	0.94	1.46	2.99	4.65	9.33
SSGPO02512	4.54	12	1	25.55	35.79	15.24	0.94	1.46	2.99	4.61	12.68
SSGPO02518	4.54	18	1	31.54	47.83	21.22	0.94	1.46	2.99	4.61	16.03
SSGPO02524	4.50	24	1	37.48	59.76	27.24	0.94	1.46	2.99	4.57	17.20
SSGPO03212	6.90	12	1 1/4	28.03	38.78	15.16	1.14	1.85	3.58	5.71	20.46
SSGPO03218	6.90	18	1 1/4	33.94	50.67	21.14	1.14	1.85	3.58	5.67	24.47
SSGPO03224	6.90	24	1 1/4	39.96	62.68	27.17	1.14	1.85	3.58	5.67	26.68
SSGPO03812	9.71	12	1 1/2	29.76	40.28	15.79	1.26	2.17	4.17	6.14	27.78
SSGPO03818	9.71	18	1 1/2	36.06	52.56	21.77	1.26	2.17	4.17	6.30	34.83
SSGPO03824	9.71	24	1 1/2	41.93	64.41	27.80	1.26	2.17	4.17	6.22	38.14
SSGPO04518	12.70	18	1 3/4	40.16	54.96	22.72	1.50	2.40	4.72	7.76	52.69
SSGPO04524	12.70	24	1 3/4	46.10	67.05	28.74	1.50	2.40	4.72	7.72	58.86
SSGPO05024	16.80	24	2	49.76	70.24	29.45	1.81	2.72	5.79	9.06	84.44
SSGPO06424	27.20	24	2 1/2	56.30	76.14	31.57	2.01	3.15	6.50	10.79	143.30

Sling Protection
Web Slings
Round Slings
Synthetic Chain Slings
Wire Rope Slings
Chain Slings
Shackles & Turnbuckles
Hooks & Links
Lifting Points
Hoists & Blocks
Lifting Devices
Pipe & Hose Restraints
Tie Down Assemblies
Tie Down Accessories
Towing & Recovery
Rope & Cordage