





Wire Rope Types

Wire Ropes come in a variety of configurations, constructions, grades and sizes. The classifications of wire rope provide the total number of strands, as well as a nominal or exact number of wires in each strand. These are general classifications and may or may not reflect the actual construction of the strands. However, all wire ropes of the same size and wire grade in each classification will have the SAME strength and weight ratings. Following is a list of the most common wire rope types sold at Super Slings.

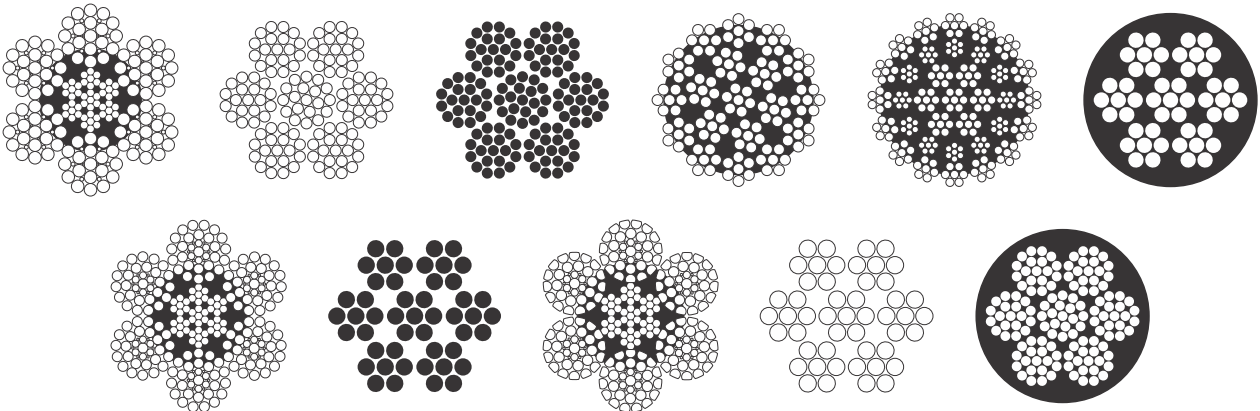

General Purpose Wire Rope

ropes are applied for general purpose such as crane, shipping, mining, fishing, logging, slings etc. And this rope is widely used for optimizing customer's

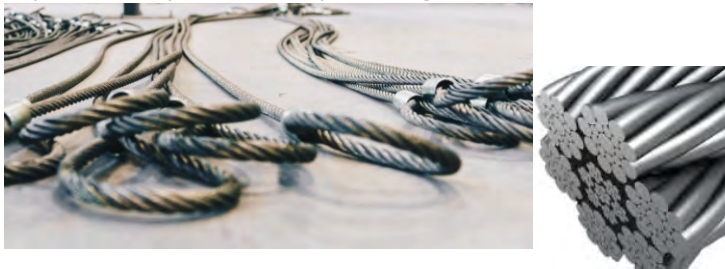


6 x 26 & 6 x 36 Wire Rope

Diameter	Minimum Breaking Strength Tons (2,000 lbs)				Weight lbs / ft.	
	IPS IWRC	IPS FC	EIPS IWRC	EIPS FC	IWRC	Fibre Core
(in)						
1/4	2.94	2.74	3.4	3.02	0.12	0.11
5/16	4.58	4.26	5.27	4.69	0.18	0.16
3/8	6.56	6.1	7.55	6.71	0.26	0.24
7/16	8.89	8.27	10.2	9.09	0.35	0.32
1/2	11.5	10.7	13.3	11.8	0.46	0.42
9/16	14.5	8.5	16.8	14.9	0.59	0.53
5/8	17.9	16.7	20.3	18.3	0.72	0.66
3/4	26.2	23.8	29.4	26.2	1.04	0.95
7/8	34.6	32.2	39.8	35.4	1.42	1.29
1	44.9	41.8	51.7	46	1.85	1.68
1 1/8	-----	-----	58.415	-----	2.34	2.13
1 1/4	56.5	52.6	65	57.9	2.89	2.63
1 3/8	69.4	64.6	79.9	85.4	3.50	3.18
1 1/2	83.5	77.7	96.8	85.4	4.16	3.78
1 5/8	98.9	92	140	101	4.88	4.44
1 3/4	115	107	132	118	5.67	5.15
1 7/8	133	124	153	136	6.50	5.91
2	152	141	174	155	7.39	6.72
2-1/4	-----	-----	247.0	-----	9.36	-----
2-1/2	-----	-----	302.0	-----	11.16	-----


6 X 36 EIPS IWRC (6X37 Classification)

6X36(WS)+IWRC
Generally Available in 5/8" - 1 1/2", offers excellent fatigue resistance ~galvanized available upon request



6 X 26 EIPS IWRC (6X19 Classification)

6X26(WS)+IWRC
Generally Available in 1/4" - 7/8", offers excellent abrasion resistance ~galvanized available upon request



SPECIAL ORDER